


DB60 NO BARK COLLAR USER MANUAL

ON/OFF Button Charging Port
Sensitivity Button

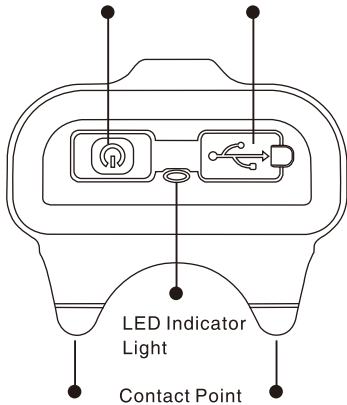

How to turn the collar off and on

Click the button once to turn it ON. You will hear a “B” from the collar.

To turn the collar OFF, hold the button for 3 seconds, the blue LED shows and then You will hear a “B” from the collar. the blue LED turn off at the same time.

No Bark Collar LED Indicator Light

On when the collar is working or set the sensitivity level.

Blink in standby status

The Red and Blue LED light will turn on during charging and the Blue LED light on when the battery fully charged.

The no bark collar DB60 stops dog barking with progressively increasing sound and shock which is controlled by a microprocessor distinguishing your dog's bark from other environmental noises and automatically sound and shock after each bark.

DB60 No Bark Collar is Mini Size, designed for puppy dogs. can be fit dogs as small as 5lbs.

HOW THE NO BARK COLLAR WORK

The NO BARK COLLAR will beep only the first time your dog barks as an initial warning. When your dog barks the second time within 30 seconds, a more intense beep is sounded along with a short, mild shock.

The more intense beep and shock are applies after each barks until your dog stops for 30 seconds, and then NO BARK COLLAR will automatically reset to the initial “Beep Only”.

NOTE: if the continues stimulus reaches the 5 times, then the collar will stop working for 30 seconds to protect the dog. the LED lights will flashing 30 seconds at the same time.

When your dog forgets and barks again, the warning tone reminds your dog without immediately applying painful stimulus. your dog will quickly learn is caused by its own barking. It takes time to break bad habits.

At each step, your dog gets to choose whether it's worth the increasing pain to bark again.

We have found this technique of progressively increasing beep and shock is not only more humane, it is more EFFECTIVE in breaking the barking habit than conventional shocking bark control collars.

HOW TO SET THE SENSITIVITY LEVEL

In Standby Status, Click the button step by step to set the sensitivity level. Level 5 is the easiest to trigger the collar.

When you hear 1 beep from the collar, that means the sensitivity level set to Level 1.

When you hear 2 beeps from the collar, that means the sensitivity level set to Level 2.

When you hear 3 beeps from the collar, that means the sensitivity level set to Level 3.

When you hear 4 beeps from the collar, that means the sensitivity level set to Level 4.

When you hear a long beep from the collar, that means the sensitivity level set to Level 5.

NOTE: some dogs will make it working just shaking his head no barks if you set to the Level 5, that means the sensitivity level is highest for your dog. you need to adjust the sensitivity level to level 4 or level 3.

How to Fit Collar on Your Dog

Place the unit around your dog's neck and adjust the collar length using the slide buckle arrangement provides with the strap. Then unit should fit snugly underneath your dog's neck.

Make sure that the contact points are in the direct contact with your dog's skin. Hair between the contact points and skin will severely diminish the shock effect, If necessary, it is advisable to clip or shave your dog's fur under the neck to insure direct contact.

CAUTION NOTES:

do not allow your dog to chew this collar. You should attempt to minimize scratching or clawing at the casing. This device is made up of plastic and electronic components that are no digestible. Consult your local vet if your dog swallows any part of this product.

Although the collar microprocessor is designed to differentiate your dog's individual bark from stray environmental noises, the unit may occasionally be activated by other vibrations or sounds. This is normal but, it should not happen so often as to be confusing to your dog.

If the unit is falsely triggered by excessive scratching, shaking of the head or rolling on the ground, your dog may be suffering from fleas or ear mites. If these activities are evident, have your dog checked by a veterinarian for parasites.

Waterproofing the Collar

To ensure the collar is 100% waterproof, make sure the rubber cover on the USB charging port on the back of the collar is fully sealed.



Made in China

The device has been approved for use in EU countries and is therefore provided with the **CE mark**. All necessary documentation is available on the website: www.electric-collars.com
Changes to technical parameters, properties and printing errors reserved.

Service center and distribution

Reedog, sro

Sedmidomky 459/8 101

00 Prague 10

Phone: +1 646 980 4569

Email: info@electric-collars.eu